


1/400

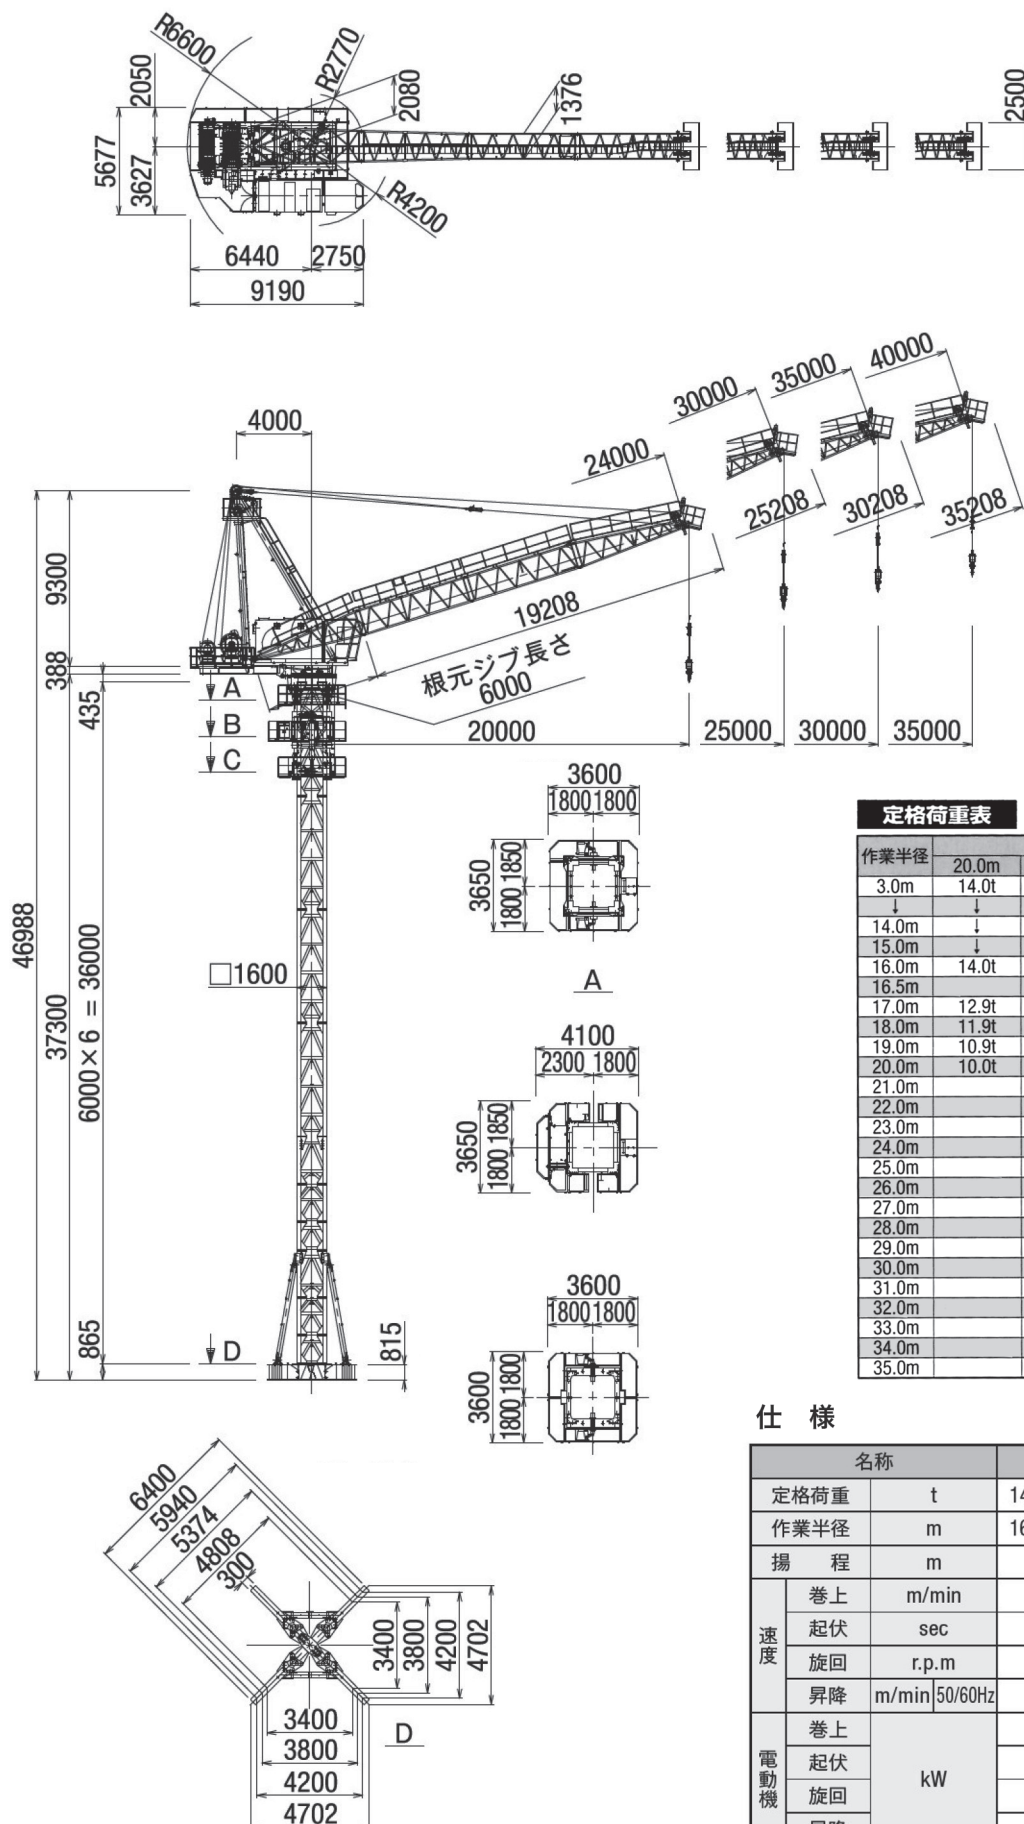

定格荷重表

作業半径	最大作業半径			
	20.0m	25.0m	30.0m	35.0m
3.0m	14.0t	14.0t	11.0t	9.0t
14.0m	↓	↓	↓	9.0t
15.0m	↓	14.0t	↓	8.6t
16.0m	14.0t	12.9t	↓	8.1t
16.5m			11.0t	
17.0m	12.9t	11.8t	10.7t	7.8t
18.0m	11.9t	11.0t	10.0t	7.4t
19.0m	10.9t	10.2t	9.4t	7.0t
20.0m	10.0t	9.6t	8.8t	6.7t
21.0m		9.0t	8.3t	6.4t
22.0m		8.4t	7.8t	6.1t
23.0m		7.9t	7.3t	5.8t
24.0m		7.5t	6.9t	5.5t
25.0m		7.0t	6.5t	5.3t
26.0m			6.1t	5.0t
27.0m			5.8t	4.8t
28.0m			5.5t	4.6t
29.0m			5.3t	4.4t
30.0m			5.0t	4.2t
31.0m				4.0t
32.0m				3.9t
33.0m				3.8t
34.0m				3.6t
35.0m				3.5t

仕 様

名称			OTA-150HN			
定格荷重		t	14-10	14-7	11-5	9-3.5
作業半径		m	16-20	15-25	16.5-30	14-35
揚程		m	最大半径時 250			
速度	巻上	m/min	31(14t) / 115(2.5t)			
	起伏	sec	122			
	旋回	r.p.m	0.49			
	昇降	m/min	50/60Hz	0.5/0.6		
電動機	巻上	kW	90			
	起伏		22			
	旋回		7.5			
	昇降		15			
操 作			運 転 室			
電源容量		kVA・A	200・400			
電 源		V	50/60Hz	400/440		